

538,260  
Rec'd PCT/PTO 09 JUN 2005

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



10/538260



(43) International Publication Date  
24 June 2004 (24.06.2004)

PCT

(10) International Publication Number  
WO 2004/053782 A1

(51) International Patent Classification<sup>7</sup>: G06K 11/16, (74) Common Representative: DANFOSS A/S; DK-6430 Nordborg (DK).  
G06F 3/033

(21) International Application Number:  
PCT/DK2003/000848

(81) Designated States (*national*): AM, AT, AU, BA, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HR, HU, IL, IN, IS, JP, KR, KZ, LT, LU, LV, MD, MK, MX, NO, NZ, PL, PT, RO, RU, SE, SG, SK, TR, UA, US, UZ, VN, YU, ZA.

(22) International Filing Date:  
10 December 2003 (10.12.2003)

(25) Filing Language: English

(84) Designated States (*regional*): Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).

(26) Publication Language: English

(30) Priority Data:  
PA 2002 01908 12 December 2002 (12.12.2002) DK

Published:  
— with international search report  
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments


(71) Applicant (*for all designated States except US*): DANFOSS A/S [DK/DK]; DK-6430 Nordborg (DK).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): GRAVESEN, Peter [DK/DK]; Hyldebørvej 6, DK-6430 Nordborg (DK). BENSLIMANE, Mohamed, Yahia [DZ/DK]; Egevej 76, DK-6430 Nordborg (DK).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: TACTILE SENSOR ELEMENT AND SENSOR ARRAY

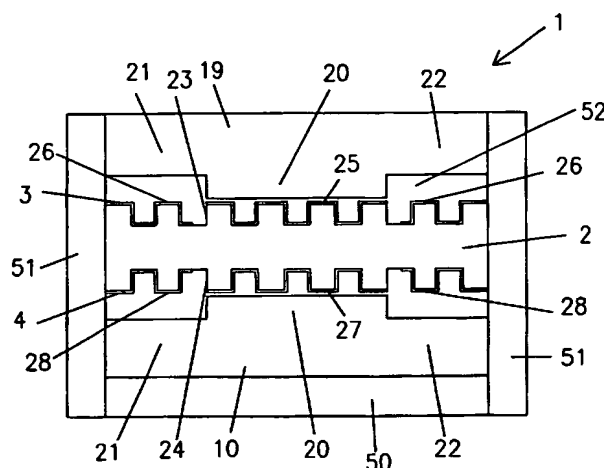

(57) Abstract: A tactile sensor element is disclosed comprising a first pressure transfer layer and a second pressure transfer layer, an elastomeric body arranged between the first and second pressure transfer layers, the body having a first and a second surface opposed to each other, the first and second surfaces having corrugations to allow displacement of elastomeric body material in a predetermined direction perpendicular to the corrugations when exposed to a contact pressure on at least one of the surfaces, a first electrode arranged on the first surface and the second electrode arranged on the second surface, the first and the second electrodes being connectable to external means for determining the capacitance of a capacitor formed by the elastomeric body and the electrodes, where at least one pressure transfer layer has at least one portion of increased thickness. Further disclosed is a tactile sensor array comprising a plurality of sensor elements according to any of the above claims, wherein the sensor elements are arranged in a row and column configuration for the determination of local pressure variations over the surface area of the sensor array, and wherein the plurality of sensor elements being integrally formed in a common elastomeric body member.

WO 2004/053782 A1

**Tactile sensor element and sensor array**

The invention relates to a tactile sensor element for converting the pressure acting on a surface of a sensor into an electrical signal. The invention further  
5 relates to sensor arrays comprising a plurality of sensor elements, allowing the determination of pressure variations over the surface of the sensor array.

Tactile sensor and tactile sensor arrays may be used in various applications to provide informations on the magnitude and the local distribution of pressure  
10 applied on a given surface area. As examples could be mentioned touch pads or drawing pads for character recognition in computer equipment, or contact pads for the determination and control of grip forces of a robotic gripping tool.

Such sensors widely known are using pressure sensitive devices based on  
15 piezo-resistive, piezo-electric or capacitive effects, and may be manufactured by thickfilm or thinfilm technologies, or using discrete elements. Miniaturization of such sensors is typically obtained by taking advantage of silicon micromachining processes. Common to these known sensors are relatively  
20 high costs for manufacturing and packaging.

It is an object of the invention to provide a novel tactile sensor element and a novel tactile sensor array, which are advantageous in regard of sensitivity, miniaturization, stability and manufacturing cost.

25 A tactile sensor element according to the invention comprises a first pressure transfer layer and a second pressure transfer layer, an elastomeric body arranged between the first and second pressure transfer layers, the body having a first and a second surface opposed to each other, the first and second surfaces having corrugations to allow displacement of elastomeric  
30 body material in a predetermined direction perpendicular to the corrugations when exposed to a contact pressure on at least one of the surfaces. The sensor element further comprises a first electrode arranged on the first surface

- 2 -

and a second electrode arranged on the second surface, the first and the second electrodes being connectable to external means for determining the capacitance of a capacitor formed by the elastomeric body and the electrodes.

5 The corrugation of the surfaces of the elastomeric body with electrodes arranged on these surfaces ensure compliance of the electrodes in case of stretching the elastic body in a direction perpendicular to the corrugation. The electrodes can follow the geometric deformation without changing their electrical properties, and without detaching from the body surfaces or even  
10 breaking. Applying pressure to the pressure transfer layers leads to a decrease in thickness of the elastic body and to a decreased distance between the electrodes. The capacitance of a capacitor formed by the electrodes will thus be increased. Measurement of the capacitance by external equipment will provide information on the pressure acting on the surface of the tactile sensor  
15 element.

At least one portion of at least one pressure transfer layer has an increased thickness in relation to the other portions of the layer.

Hereby, the pressure acting on the tactile sensor element will be transferred to  
20 the elastomeric body by squeezing the body only in a region corresponding to the portion of increased thickness. On activation of the sensor, by pressing on the pressure transfer layer, the displaced material of the body is accommodated in the space formed between the thinner portions of the pressure transfer layer and the elastomeric body.

25

In a preferred embodiment, at least one pressure transfer layer has a central portion of increased thickness and, on each side of the central portion in the predetermined direction of extension of the body, an end portion of decreased thickness. Hereby, the tactile sensor element is divided into three sections,  
30 where the elastomeric body in a central section adjacent to the central portion of the pressure transfer layer will be squeezed and reduced in thickness. Body material from the central section will be pressed in a direction perpendicular to

- 3 -

the corrugations towards the body sections adjacent to the end portions of the pressure transfer layer. The thinner transfer layer in these locations allows an increase in thickness of the body due to the body material displaced from the central section. However, it is important to note, that the overall longitudinal dimensions of the sensor element in the direction of extension will be substantially unchanged.

Preferably, the electrode on at least one of the surfaces comprises a first electrode portion adjacent to the central portion of the pressure transfer layer and second electrode portions adjacent to the end portions of the pressure transfer layer, the first and second electrode portions being isolated from each other. If pressure is applied to the sensor element, the first electrode portions covering the central section of the body form a first capacitor with increasing capacitance, while the second electrode portions form a second capacitor with decreasing capacitance. It is now possible to measure a differential capacitive signal as a function of pressure. This is advantageous to increase the sensor sensitivity and to eliminate measurement errors due to changing environmental conditions.

Preferably, the surface area of the first electrode portion is substantially equal to the total surface area of the second electrode portions. Hereby, the initial capacitance for both capacitors is substantially equal, which simplifies the determination of differential capacitance with the external electronic means.

Preferably, lateral means are provided on two opposed sides of the sensor element to prevent overall dimensional change of the sensor element in the predetermined direction. Hereby it is assured, that the force applied to the pressure transfer layer is utilized for displacement of the body material, which increases the sensitivity of the sensor element.

30

Preferably, the thickness of the pressure transfer layer is substantially equal to the thickness of the elastomeric body. Hereby, the body will be subjected to

- 4 -

the major part of the pressure forces acting on the surfaces of pressure transfer layers.

5 Preferably, the elastomeric body and the pressure transfer layers have similar elastomeric properties. Hereby, and in combination with the high coefficient of friction between the electrodes and the pressure transfer layers, the elastic deformation of both the body and the pressure transfer layers, resulting from the pressure forces acting on the surfaces of the pressure transfer layers, can follow each other.

10

A tactile sensor array is disclosed, comprising a plurality of sensor elements, wherein the sensor elements are arranged in a row and column configuration for the determination of local pressure variations over the surface area of the sensor array, and wherein the plurality of sensor elements being integrally formed in a common elastomeric body member. A sensor array of this kind shows significant manufacturing cost advantages, as a large amount of sensor element bodies can be manufactured in a single process. High resolution tactile sensor arrays can be provided, where each sensor element presents a pixel-like element of the array.

20

Preferably, each row of sensor elements comprises an elongated common elastomeric body member, the body member constituting a continuous sequence of sensor element bodies.

25 Hereby, a row of sensor elements is provided on the basis of a single elongated elastomeric member with corrugated surfaces. Several rows are arranged to constitute a two-dimensional sensor array.

Preferred embodiments of the invention will in the following be described with reference to the drawing, where

30

- 5 -

Fig. 1 shows a side view of a tactile sensor element with a pressure transfer layer of uniform thickness in unloaded state,

Fig. 2 shows a side view of the same sensor element in loaded state,

5 Fig. 3 shows a side view of a tactile sensor element with a pressure transfer layer having portions of increased and decreased thickness, in unloaded state,

Fig. 4 shows a side view of the sensor element in Fig.3 in loaded state,

Fig. 5 shows a top view of a tactile sensor array comprising a plurality of sensor elements of Fig. 3

Fig. 6 shows a side view of the sensor array in Fig. 5

10

Fig. 1 shows a tactile sensor element 1 with an elastomeric body 2, preferably made of silicon rubber sheet material. The body has upper and lower surfaces 3 and 4, which have corrugations in the form of parallel ridges and grooves 5 and 6 running across the width of the body in a direction perpendicular to the drawing plane. The ridges and grooves are shown with square profiles, however, other profiles such as sinusoidal or rectangular may be applicable. The depth  $b$  of the grooves is typically in the range of 10 to 30 % of the total thickness  $d$  of the body, which typically is 10 to 50  $\mu\text{m}$ . As an example, the body has a thickness of 20  $\mu\text{m}$  with corrugation depths of 5  $\mu\text{m}$ .

20

Metal electrodes 7 and 8 are arranged on both upper and lower surfaces 3 and 4 by deposition of a thin uniform metal layer, such as gold, silver or copper, by use of suitable deposition technique. The electrodes are connected with lead wires 11 to external means 12 for measuring the capacitance of a capacitor formed by the electrodes. Interconnection between the electrodes and the lead wires is established by suitable bonding, welding or soldering technique. The thickness of the electrode layer is typically in the range of 20 to 100 nm.

25

The sensor element further comprises upper and lower pressure transfer layers 9 and 10 opposed to and covering the upper and lower surfaces of the body. The pressure transfer layers of this embodiment are made of elastomeric material having similar elastic properties as the body material.

30

- 6 -

Typically, the thickness for the pressure transfer layers is in the same range as the thickness of the body. The lower pressure transfer layer 10 is in contact with a support body 13 to prevent relative movement between the support and the pressure transfer layer.

5

Fig. 2 shows the sensor element of Fig. 1 exposed to a pressure  $p$  on top of the upper pressure transfer layer 9. The pressure transfer layers are now brought into contact with the surfaces 3 and 4 of the elastomeric body, transferring the pressure to the body, which will be subjected to elastic deformation. Due to the corrugated structure of the body surfaces, the electrodes 7 and 8 deposited thereon are compliant in a longitudinal direction perpendicular to the ridges and grooves. Compliance of the electrodes in the direction of ridges and grooves is negligible due to the high elastic modulus of the electrode material. Thus, squeezing of the body leads to a reduction in thickness and to an elongation of the body in the longitudinal direction. The coefficient of friction between the electrodes and the material of the pressure transfer layer are sufficiently high to avoid relative movements between the body with the electrodes and the surface of the pressure transfer layers. Due to the similar elastomeric properties and thickness dimensions of pressure transfer layers 9, 10 and body 2, the elongation of the elastic pressure transfer layers and the body are thereby following each other. External means 12 will now measure an increased capacitance, as the distance between the electrodes is reduced. A linear relationship is achieved between the applied pressure and the measured capacitance change.

25

A tactile sensor element according to the invention is shown in Fig. 3 in unloaded state and in Fig. 4 in loaded state. Each of the pressure transfer layers 9 and 10 now comprise a central portion 20 of increased thickness and end portions 21 and 22 of decreased thickness.

30

Between the pressure transfer layers is arranged an elastomeric body 2 with corrugated surfaces 3 and 4, having ridges and grooves extending perpendicular to the predetermined direction of extension of the body 2. The

- 7 -

thickness of the central portion 20 of the pressure transfer layers 9, 10 is substantially equal to the thickness of the body 2. The first electrode deposited on the upper surface 3 of the body is divided into a first electrode portion 25, arranged adjacent to the central portion 20 of the pressure transfer layer 9, and into second electrode portions 26 arranged adjacent to the end portions 21 and 22 of the pressure transfer layer 9. In a similar manner, the second electrode deposited on the lower surface 4 of the body is divided into a first electrode section 27, arranged adjacent to central portion 20 of pressure transfer layer 10, and into second electrode portions 28 adjacent to the end portions 21 and 22 of pressure transfer layer 10. The electrode portions arranged on each surface of the body are isolated from each other, which results in three independent capacitors: a first capacitor formed by first electrode portions 25 and 27 and two capacitors, each of which is formed by a second electrode portion 26 and a second electrode portion 28. Surface portions 23 of surface 3 and surface portions 24 of surface 4 are not covered by electrode material.

The first electrode portions 25 and 27 are connected by lead wires 29 (see Fig.4) to the external means 12 for determining the capacitance of the first capacitor. The second electrode portions 26 are connected to the external means through common lead wire 30, and second electrode portions 28 through common lead wire 31. Hereby, the capacitance of a common second capacitor formed by the second electrodes 26 and the second electrodes 28 can be measured.

To simplify wiring, all the electrode portions arranged on one surface of the elastomeric body could be interconnected to define a common ground electrode.

Second pressure transfer layer 10 is attached to a support body 50. Lateral means 51 for avoiding deformation of the sensor element in the longitudinal direction are arranged on both sides of the sensor element.

Spaces 52 between the pressure transfer layers and the body are evacuated. Alternatively, pressure equalizing means (not shown) may be provided between the spaces and the outside environment of the sensor element.

5

Fig. 4 shows the sensor element in loaded state, where a load is indicated as a pressure  $p$  acting on the upper surface of a relatively soft pressure transfer layer 9. The elastomeric body 2 is squeezed by the central portions 20 of the pressure transfer layers. Lateral means 51 prevent deformation of the sensor element in the longitudinal direction. Part of the material of the elastomeric body is being displaced in a direction perpendicular to the ridges and grooves formed in the surface of the body. Accordingly, the thickness of the elastomeric body decreases between the central portions 20, and the thickness of the body increases between the end portions 21 and 22 of the pressure transfer layers.

10 The coefficient of friction between the electrodes and the surface of the pressure transfer layer is sufficiently high to avoid sliding movement of the ridges on the surface of the pressure transfer layer. Thereby, as it can be seen from Fig. 4, the corrugation pitch, represented by the longitudinal distance between adjacent ridges, has increased between the central portions of the pressure transfer layers, and has decreased between the end portions.

15 20

The capacitance of the first capacitor formed by the first electrode portions 25 and 27 has increased, while the capacitance of the capacitor formed by the second electrode portions 26 and 28 has decreased. A difference in capacitance in dependence of the applied pressure acting on the sensor element can be measured by the external means 12.

25

Fig. 5 shows a top view of a tactile sensor array 40 comprising plurality of sensor elements 1 according to Fig. 3 with the first pressure transfer layer 9 removed.

30

- 9 -

The array 40 comprises frame portions 41 and several elongated elastomeric body members 42 in the shape of rubber strips, each body member constituting a continuous row of sensor element bodies 2, illustrated by dashed lines. A spacing 43 is provided between adjacent rubber strips or adjacent rows of sensor elements to ensure independent actuation of the sensor elements. Lateral means 51 of the sensor element in Fig.3 are also removed. Their lateral limiting function is now performed by the neighboring sensor elements within a row of sensors and by the frame 41.

10 The corrugation of the surface of the body members in the form of straight and parallel ridges and grooves extending along the width of the strips is only illustrated for a single sensor element body 2.

Fig. 6 shows a side view of the sensor array in Fig.5, illustrating the realization of a plurality of sensor elements 1 in an elongated elastomeric body member 42. This is possible by the fact that, upon actuation of a single sensor element, displacement of elastomeric material is substantially limited to the region of this sensor element.

20 Depending on the intended application for a sensor array according to the invention, the dimensions for a single sensor element (pixel size) may vary from an upper range of several centimeters to a minimum of 100  $\mu\text{m}$ . With a length of 200  $\mu\text{m}$  and a width of 100  $\mu\text{m}$  for a single sensor element 2, the length of the elastomeric body member 42 as shown in Fig.6, which is constituted by six sensor elements, will be 1.2 mm. A square shape sensor array with a total area of 1.5  $\text{mm}^2$  would contain twelve body members, resulting in a number of pixels of 72. It can be understood, that high-resolution tactile sensor arrays can be realized even with limited overall dimensions.

30 The scope of the invention shall not be limited to elastomeric bodies having straight-line corrugations. Other corrugation shapes as concentric circles, squares or rectangles may be applicable as well.

Patent claims

1. A tactile sensor element (1) comprising  
a first pressure transfer layer (9) and a second pressure transfer layer (10),  
5 an elastomeric body (2) arranged between the first and second pressure  
transfer layers, the body (2) having a first surface (3) and a second surface (4)  
opposed to each other, the first and second surfaces having corrugations (5, 6)  
to allow displacement of elastomeric body material in a predetermined  
direction perpendicular to the corrugations when exposed to a contact  
10 pressure on at least one of the surfaces (3, 4),  
a first electrode (7) arranged on the first surface (3) and a second electrode (8)  
arranged on the second surface (4), the first and the second electrodes being  
connectable to external means (12) for determining the capacitance of a  
capacitor formed by the elastomeric body (2) and the electrodes (7, 8),  
15 characterized in that at least one pressure transfer layer (9, 10) has at least  
one portion (20 -22) of increased thickness.

2. A tactile sensor element according to claim 1, characterized in that at least  
one pressure transfer layer (9, 10) has a central portion (20) of increased  
20 thickness and, on each side of the central portion in the predetermined  
direction of extension of the body, an end portion (21, 22) of decreased  
thickness.

3. A tactile sensor element according to claim 1 or 2, characterized in that the  
25 electrode (7, 8) on at least one of the surfaces (3, 4) comprise a first electrode  
portion (25, 27) adjacent to the central portion (20) of the pressure transfer  
layer (9, 10) and second electrode portions (26, 28) adjacent to the end  
portions (21, 22) of the pressure transfer layer, the first and second electrode  
portions being isolated from each other.

- 11 -

4. A tactile sensor element according claims 3, characterized in that the surface area of the first electrode portion (25, 27) is substantially equal to the total surface area of the second electrode portions (26, 28).
- 5 5. A tactile sensor element according to any of claims 1 to 4, characterized in that lateral means (51) are provided on two opposite sides of the sensor element for preventing overall dimensional change of the sensor element in the predetermined direction.
- 10 6. A tactile sensor element according to any of claim 1 - 5, characterized in that the thickness of the pressure transfer layer (9, 10) is substantially equal to the thickness of the elastomeric body (2).
- 15 7. A tactile sensor element according to any of claim 1 - 6, characterized in that the elastomeric body (2) and the pressure transfer layers (9, 10) have similar elastomeric properties.
- 20 8. A tactile sensor array (40) comprising a plurality of sensor elements (1) according to any of the above claims, characterized in that the sensor elements are arranged in a row and column configuration for the determination of local pressure variations over the surface area of the sensor array, and wherein the plurality of sensor elements (1) being integrally formed in a common elastomeric body member (42).
- 25 9. A tactile sensor array according to claim 8, characterized in that each row of sensor elements (1) comprises an elongated common elastomeric body member (42), the body member constituting a continuous sequence of sensor element bodies (2).
- 30 10. A tactile sensor array according to claim 9, characterized in that the elastomeric body member (42) has corrugations (5, 6) extending perpendicular

- 12 -

to the longitudinal direction of the elongated body member (42), and wherein adjacent body members are spaced from each other.

5

10

1/4

Fig. 1



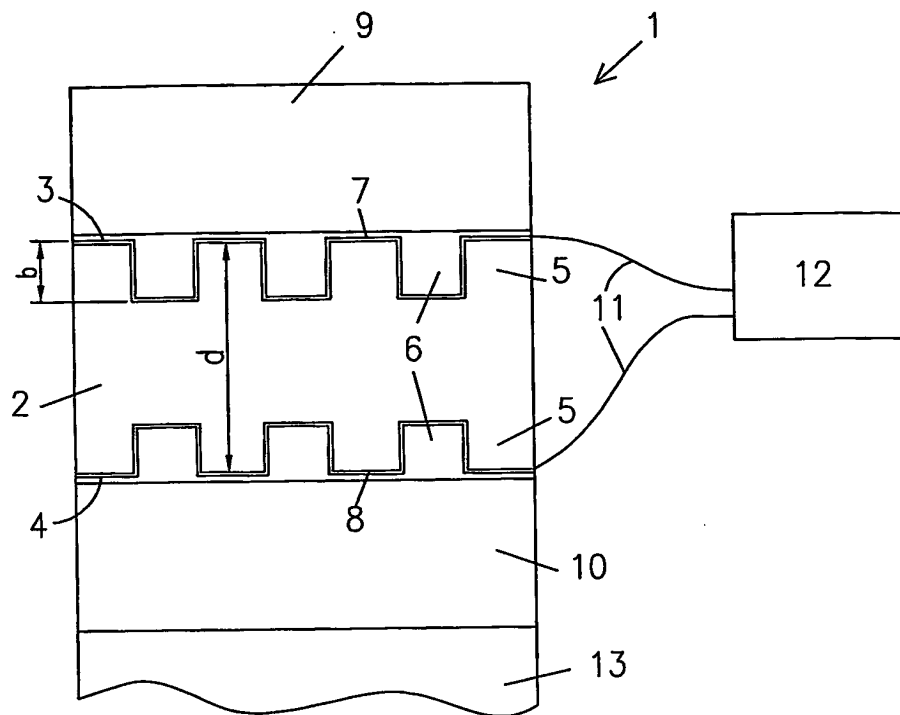


Fig. 2

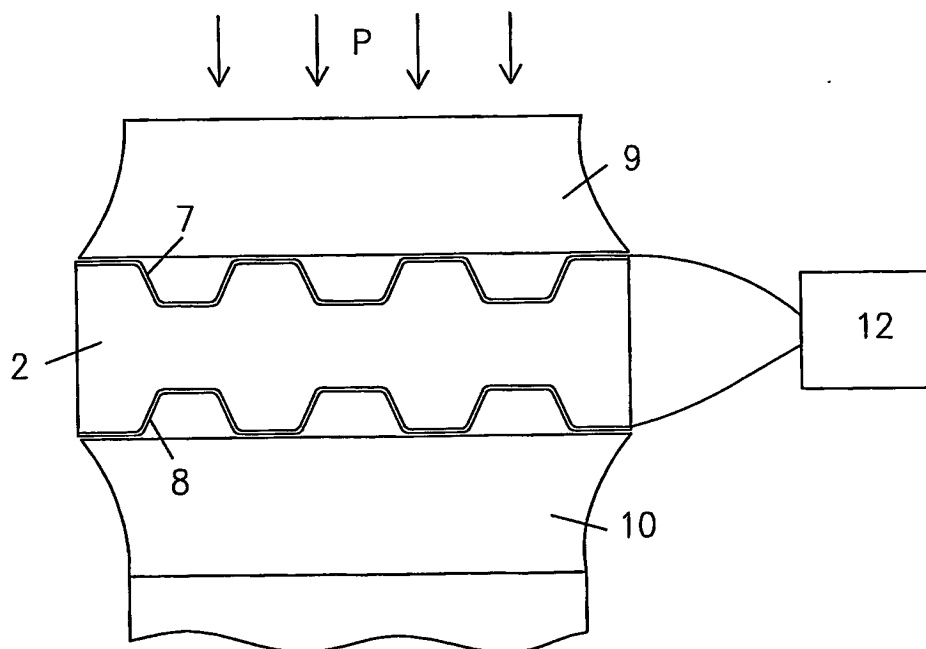


2/4

Fig. 3

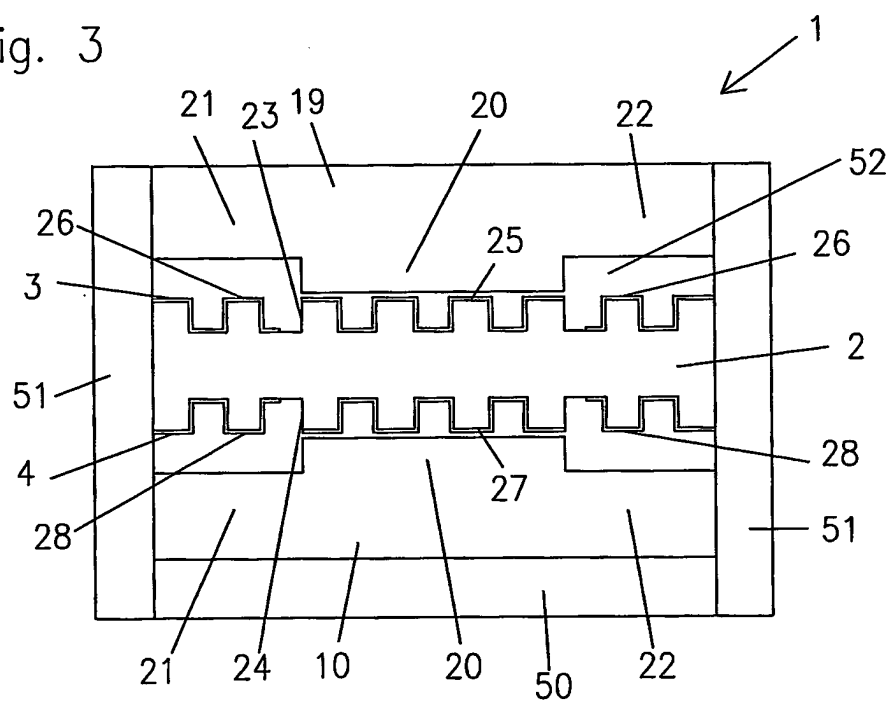

3/4

Fig. 4

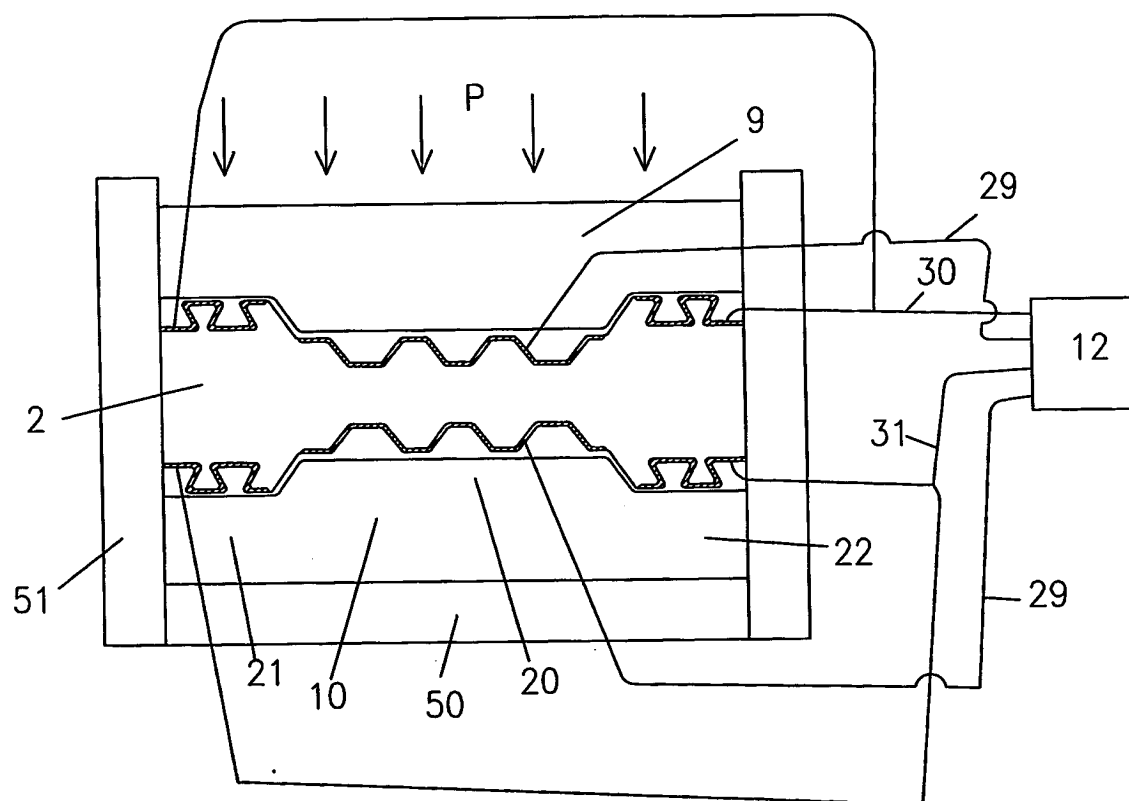

4/4

Fig. 5


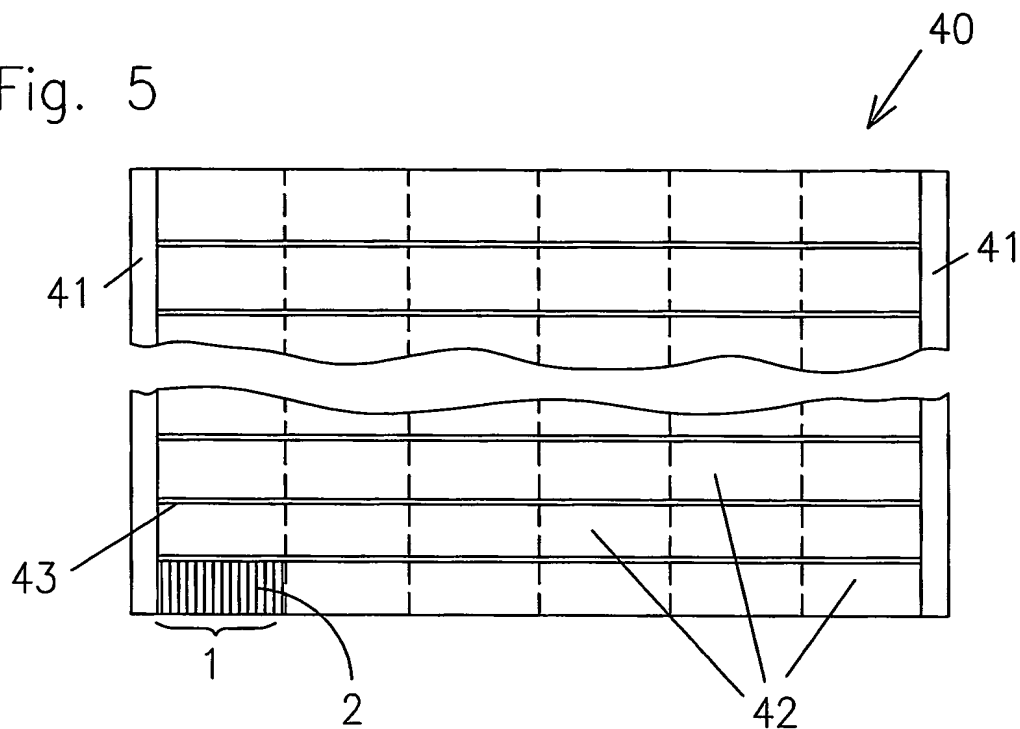


Fig. 6

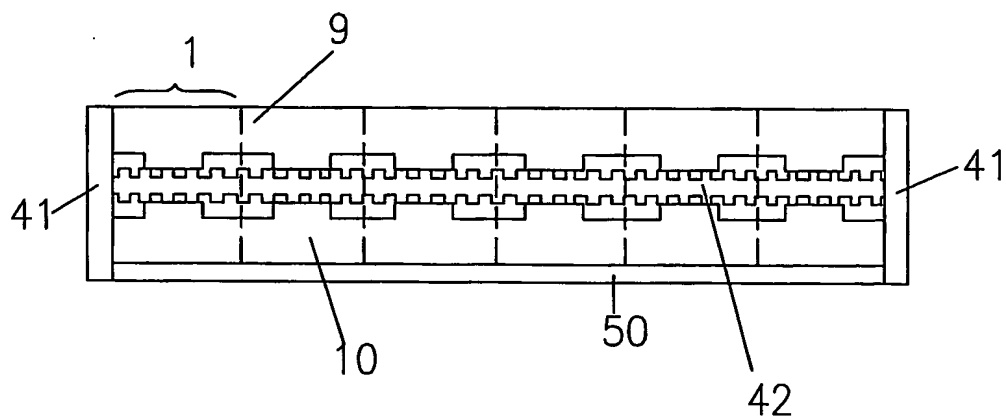

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/DK 03/00848

**A. CLASSIFICATION OF SUBJECT MATTER**  
 IPC 7 G06K11/16 G06F3/033

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G06K G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 634 917 A (DVORSKY JAMES E ET AL) 6 January 1987 (1987-01-06) the whole document	1-10
A	US 5 528 452 A (KO WEN H) 18 June 1996 (1996-06-18) the whole document	1-10
A	KR 9 001 465 B (ROSEMOUNT INC) 12 March 1990 (1990-03-12) the whole document	1-10

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

25 March 2004

Date of mailing of the international search report

28. 04. 2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax: (+31-70) 340-3016

Authorized officer

JAN SILFVERLING/MN

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/DK 03/00848

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4634917	A	06-01-1987	EP 0235494 A1	09-09-1987
US 5528452	A	18-06-1996	AU 686916 B2	12-02-1998
			AU 4158196 A	17-06-1996
			BR 9509747 A	21-10-1997
			CA 2205169 A1	30-05-1996
			CN 1172547 A ,B	04-02-1998
			DE 69529477 D1	27-02-2003
			DE 69529477 T2	31-07-2003
			DE 818046 T1	16-07-1998
			EP 1286147 A1	26-02-2003
			EP 0818046 A1	14-01-1998
			ES 2118672 T1	01-10-1998
			JP 10509241 T	08-09-1998
			PL 320670 A1	27-10-1997
			RU 2171455 C2	27-07-2001
			WO 9616418 A1	30-05-1996
			US 5585311 A	17-12-1996
KR 9001465	B	12-03-1990	KR 9001465 B1	12-03-1990